

Genie[®]
A TEREX BRAND



AERIAL WORK PLATFORMS

CUSTOMERS FIRST. ALWAYS.

PARTNERING FOR SUCCESS

Our dedication to lifting you higher extends well beyond the physical reach of our products. We thrive on building satisfying customer relationships founded on the idea of partnership. Because you, our customer, are at the centre of everything we do.

Since 1966, we've been developing products to solve your work site challenges — and that process never ends. Our team of product managers and engineers uses your input to design new products, featuring the latest technology to meet your changing needs. Then we manufacture those products to stringent standards that help increase quality, lower costs and give you exceptional value for years to come.

PROVIDING SUPERIOR VALUE

Our commitment doesn't end with the sale. Our dedicated service teams provide support when you need it most. Our extensive parts network ships most parts within 24 hours. Simply put, we're always working to help maximize your "up time" so you can be more successful.

We are driven by one goal: doing the right thing, at the right time for our customers. That's not just what we do; it's who we are. So tell us what you need. We're listening.



Genie[®]
A TEREX BRAND

SETTING THE STANDARD

We manufacture some of the most advanced, highest-valued lift equipment in the industry. The distinctive blue Genie[®] lifts set the standard for performance and durability — not to mention support from people who understand your business.



CONVENIENCE

IN A COST-EFFECTIVE PACKAGE

Genie® aerial work platforms are easy to use and cost effective, making them the first choice for a wide range of applications. One person can easily set them up and get to work within minutes, providing the ideal all-around tool for almost any access application. Their light weight and compact size make Genie® aerial work platforms convenient to use in schools, churches, warehouses and more. Genie® aerial work platforms also provide solutions for internal work on large construction sites, like high rises, as well as being perfect for light-duty construction purposes.

Genie® aerial work platforms are designed to enhance productivity in the workplace. Flexible features on the AWP™, IWP™, DPL™, Runabout™ and QuickStock™ models offer convenience at a low cost. Their lightweight construction makes them easy to manoeuvre, use and transport, delivering maximum uptime. Each model offers a variety of options and accessories to customize your machine. Genie® aerial work platforms offer an economical solution for all your access needs.

The patented Genie® mast system is the most rigid in the industry.

CONVENIENT, VERSATILE ACCESS

Genie® AWP™ Super Series aerial work platforms are an industry favourite due to their ease of use, convenience and flexibility. Their lightweight manoeuvrability and durable design make them a versatile option for a wide variety of rental, light-duty construction and maintenance applications.



A BASE TO FIT YOUR NEEDS

Choose from two bases (standard or rough terrain) and different platform options for the exact lift that meets your access needs.



STANDARD BASE

Our most popular model, perfect for everyday applications.

TILT-BACK

A tilt-back frame allows AWP™-36 and AWP™-40 models to roll through standard doorways.



ROUGH TERRAIN BASE

Ideal for use on unfinished surfaces.

EASY TRANSPORT

The unique rear mast pivot bar and lightweight design allow it to be easily loaded into a pickup truck. Outrigger storage and forklift pockets, tie-down attachment points and an overhead crane attachment point add transportation convenience.





DURABLE MAST AND PLATFORM

The patented Genie® mast system is the most rigid in the industry. Constructed of durable aircraft-quality aluminum, the mast provides user comfort and security at all working heights.



USER-FRIENDLY CONTROLS

Controls include a low battery indicator, locking key switch and dual-activated up/down switch as well as outrigger setup confirmation lights. All AC and DC models are equipped with an auxiliary platform-lowering feature for descent in the event of a power failure.



DOORWAY ACCESS AND MANOEUVRABILITY

All units roll through standard doorways for easy access, and models up to 9.1 m (30 ft) don't even need to be tilted back. An exclusive six-point wheel and caster rocker base system also manoeuvres easily around corners and over thresholds or debris.



CLOSE ACCESS

The compact X-pattern outrigger footprint is the smallest in the industry, allowing access as close as 8 cm (3 in) from walls. With proximity like that, you'll be within easy arm's reach of your job. Simple setup and 2 to 14 m (6 to 46 ft) of working height make the AWP™ the ideal choice for applications requiring close access.

AERIAL WORK PLATFORM MODELS AVAILABLE

AWP™-20S

AWP™-25S

AWP™-30S

AWP™-36S

AWP™-40S



STABILITY AND RELIABILITY

Genie® IWP™ Super Series lifts can be easily moved around your worksite and set up in seconds. In addition, all AC and DC models are equipped with an auxiliary platform-lowering feature on both platform and ground controls, enabling descent in the event of a power failure. Reaching heights of 11 m (35 ft 6 in), the easy-to-use IWP™ comes in two base models (standard and wide) with four different platform options to meet your specific application requirements.




USER-FRIENDLY PLATFORM AND CONTROLS

Control features include a low battery indicator, locking key switch, a dual-activated up/down switch and proper setup confirmation. Select units have a ground fault interrupt receptacle on the platform for convenient use of power tools.



Effortless setup in seconds quickly gets you working at heights of up to 11 m (35 ft 6 in).

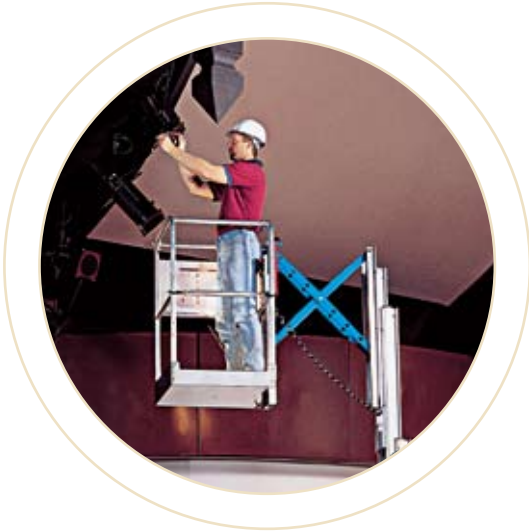

OUTREACH OPTION


Provides over 66 cm (2 ft 2 in) of additional horizontal reach (IWP™-20S only). Ideal for manoeuvring up and over shelves, machinery and equipment.

EXCEPTIONAL STABILITY

Rigid aluminium mast provides user comfort and security, and features heavy-duty lifting chains for strength and reliability. Units also feature built-in automatic level sensing. Two front integral levelling jacks provide an additional 5 cm (2 in) of adjustability.

DOORWAY ACCESS

The standard base model easily rolls through standard doorways. Wide base models roll through typical industrial double doorways.

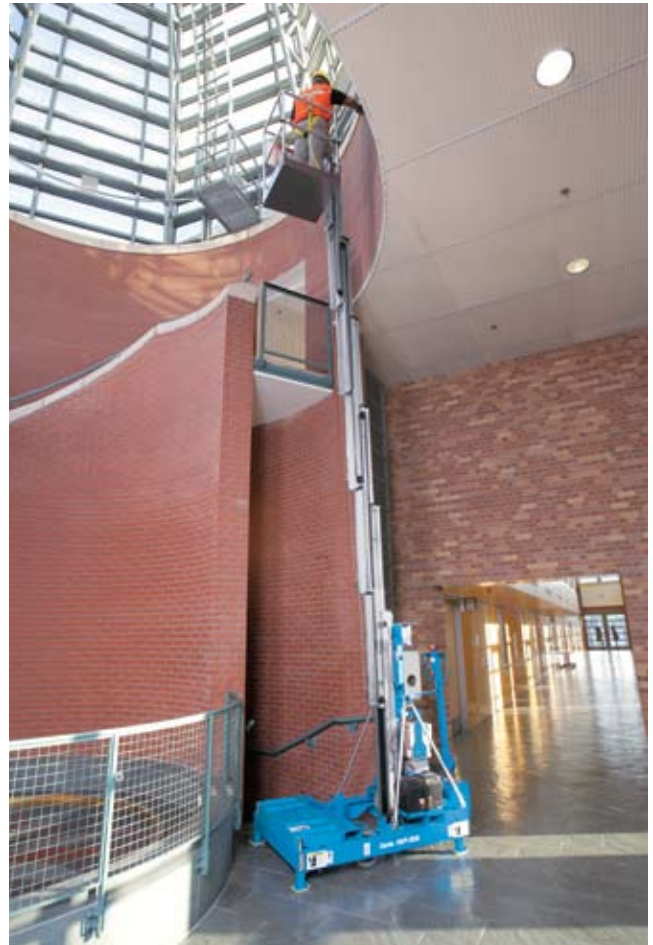

POWER WHEEL ASSIST

A power wheel assist on DC models activates hydraulic forward and reverse drive for faster, easier manoeuvrability. This option makes navigation of the IWP™ Super Series simple and effortless.

INDUSTRIAL WORK PLATFORM MODELS AVAILABLE

IWP™-20S

IWP™-25S

IWP™-30S

CONVENIENCE AND VALUE

The Genie® DPL™ Super Series is a cost-effective option. These versatile machines combine tight access manoeuvrability with ample space for two workers and their tools on the larger platform. They also offer exceptional stability with a patented aluminium mast system, heavy-duty lifting chains and a welded steel base that stands up to tough job site conditions. Bottom line, they're the ideal choice for big jobs in small spaces.



EASY-TO-USE CONTROLS

Ground controls feature outrigger setup confirmation lights, low-battery indicator (DC models), and locking key switch. Dual-activated platform controls are easy to operate. Auxiliary platform lowering allows descent in the event of a power failure.

SMOOTH, EFFICIENT POWER

AC (110 V or 220 V) and DC (12 V) power options are available — delivering clean, quiet operation for indoor use.



DOORWAY ACCESS

The DPL™ rolls through standard doorways, and a convenient handle provides easy steering and manoeuvrability. The 4-position, non-marking swivel lock casters allow 360° rotation in areas as small as 2.24 m x .79 m (7 ft 4 in x 2 ft 7 in).



EASY STORAGE AND TRANSPORT

Outrigger storage sockets, multi-directional forklift pockets and sturdy tie-down attachment points help you secure the machine for easy transport. Winch attachment points let you easily winch the DPL™ on and off roll-back trucks.



DUAL PERSONNEL LIFT MODELS AVAILABLE

DPL™-25S

DPL™-30S

DPL™-35S

OPTIONS

FOR GENIE® AWP™, IWP™, DPL™ MODELS

AWP™-20S AWP™-25S AWP™-30S AWP™-36S AWP™-40S IWP™-20S IWP™-25S IWP™-30S DPL™-25S DPL™-30S DPL™-35S

BASE OPTIONS											
STANDARD BASE	S	S	S	S	S	S	S		S	S	S
ROUGH TERRAIN BASE	O	O	O								
WIDE BASE								S			
POWER OPTIONS											
AC	O	O	O	O	O	O	O	O	O	O	O
DC	O	O	O	O	O	O	O	O	O	O	O
DUAL BATTERY PACKAGE						O	O	O			
AIR MOTOR			O								
OTHER OPTIONS											
TILT-BACK OPTION				S	S						
OUTREACH PACKAGE							O				
POWER WHEEL ASSIST						O	O	O			
ACCESSORIES											
NARROW BASE CONVERSION KIT (AVAILABLE FOR RT BASE ONLY)	O	O	O								
RT BASE CONVERSION KIT (AVAILABLE FOR NARROW BASE ONLY)	O	O	O								
SUPER STRADDLE™	O	O	O	O	O						
TOOL TRAY	O	O	O	O	O	O	O	O	O	O	O
PLATFORM-LOCATING LASER LIGHT	O	O	O	O	O	O	O	O	O	O	O
FLUORESCENT TUBE CADDY	O	O	O	O	O	O	O	O	O	O	O
OPERATIONAL WARNING LIGHT AND DESCENT ALARM PACKAGE	O	O	O	O	O	O	O	O	O	O	O

O = OPTION S = STANDARD

OUTREACH PACKAGE

This package, available for the IWP™-20S, provides 66 cm (2 ft 2 in) of additional horizontal reach. The outreach option is ideal for applications that require manoeuvring up and over shelves, equipment and other obstacles.

THE GENIE® SUPER STRADDLE™

Work over fixed seating in places such as auditoriums, convention centres and manufacturing or maintenance facilities. Easy to assemble, the Super Straddle™ provides up to 1.22 m (4 ft) of vertical clearance. End frames adjust for leveling on floors with slopes up to 6°. Outriggers must be in place to operate (AWP™ series only).



PRODUCTIVE SOLUTIONS

The Genie® Runabout™ family products, including the Runabout™ (GR™), the Runabout™ Contractor (GRC™) and the Runabout™ with jib (GR™-J) are compact, low-weight machines and driveable when fully elevated for increased productivity on the job.

Efficient operation and convenient setup make the Runabout™ ideal for warehousing, transporting, general maintenance. The construction-ready Runabout™ Contractor and the jib version of our popular Genie® Runabout™ feature a tube-in-tube telescoping mast and steel platform for durability in rougher environments. The Runabout™ with jib range gives our customers more choices for indoor and outdoor industrial, maintenance and construction applications. With an outstanding 140° jib range of motion and a narrow footprint, the GR™-20J and GR™-26J are ideal for locations where superior outreach in confined spaces is required.

COMPACT ACCESSIBILITY

Narrow 75 to 80 cm (2 ft 5.5 in to 2 ft 7.5 in) width and 1.35 m (4 ft 5 in) length allows the GR™ and GRC™ models to fit in most passenger lifts. Units can be driven through doorways with an operator on board and have 6 cm (2.5 in) of ground clearance in stowed position.



EXCELLENT MANOEUVRABILITY

Features on the GR™ and the GRC™ include zero inside turning radius, 30% gradeability, a spring-applied hydraulically released brake system and 25 cm (10 in) non-marking solid rubber tyres.



EASY CONTROL AND SERVICE

Platform controls are equipped with on-board diagnostics. Auxiliary platform lowering enables descent in the event of a power failure. Proportional lift and drive controls provide a smooth ride. Plus, hinged rear covers allow easy access to all major components for convenient servicing.

REACH FURTHER

The GRC™ model features a standard extension deck which provides a large work space for up to two operators and offers an extra 44 cm (17.5 in) of outreach.

Compact size and full elevation drive features deliver superior productivity.



GENIE® RUNABOUT™ WITH JIB OFFERS MORE VERSATILITY

The GR™-20J and the GR™-26J respectively offer an “up-and-over” maximum clearance of 4.25 (13 ft 10.7 in) and 6.70 m (21 ft 10.5 in) and a maximum horizontal reach of 3.25 m (10 ft 7 in) and 3.15 m (10 ft 3 in). With respective low unit weights of 2,250 kg (4,960 lbs) and 2,650 kg (5,842 lbs), the GR™-20J and GR™-26J are easy to transport.



QUIET AND COMFORTABLE DRIVE FUNCTIONS

The drive system’s variable speed DC motor makes precise adjustments in tight areas. It also provides progressive braking as soon as the joystick is released, making the unit extremely responsive. With dual rear wheel drive and a tight 0.49 m (1 ft 7 in) inside turning radius, the GR™-J models easily manoeuvre around restrictive work environments to fit through congested industrial areas, corridors and hallways. Standard non-marking tyres allow use on sensitive flooring.

FIELD PROVEN MAINTENANCE

Both models use a field-proven maintenance-free hydraulic mast system for durability and for reduced overall maintenance costs. As a safeguard against worksite damage, the door panels are made from ABS thermoplastic that provides flexibility while retaining its original shape.

GET MORE DONE IN A SMALL AMOUNT OF SPACE

Both models allow two-person occupancy indoors to get more done in a small amount of space. The 0.90 m x 0.75 m (2 ft 11 in x 2 ft 5.5 in) compact steel work platform features a low entry height of 15 cm (6 in).

GENIE® RUNABOUT™, RUNABOUT™ CONTRACTOR AND RUNABOUT™ WITH JIB MODELS

GR™-12

GR™-15

GR™-20

GR™-20J

GR™-26J

GRC™-12

STREAMLINE INVENTORY

The Genie® QuickStock™ lift is designed to make your inventory picking faster, easier and safer than rolling stairs or manually propelled lifts. It is available in three Runabout™ model heights (3.48 m/11 ft 5 in, 4.47 m/14 ft 8 in, and 6.07m/19 ft 11 in) and comes in two different versions: Retail (R) or Warehouse (W). All the units are also driveable when fully elevated for increased productivity.



GENIE® QUICKSTOCK™ STREAMLINES INVENTORY MANAGEMENT

With a footprint of just 1.35 m (53 in) by .75 m (29.5 in) and a zero inside turning radius, the QuickStock™ easily manoeuvres through tight aisle ways. A capacity up to 227 kg (500 lbs), or 159 kg (350 lbs) for the QS™-20, facilitates picking and placing large boxes, bicycles and irregular objects from high stocking locations. Dual platform swing-gates provide the operator with easy access no matter which direction the unit is facing while parked next to shelving.

GENIE® QUICKSTOCK™ RETAIL VERSION

The Genie® QuickStock™ lift Retail version offers standard features customised for front of the house applications. Dual flashing beacons notify surrounding people that the unit is in operation. Additionally, an obstruction sensing pad located on top of the chassis senses when an object is on the unit, causing the platform to automatically stop descending.



EASY TO MAINTAIN

Enclosed wiring, maintenance-free batteries and an industrially-proven design provide low machine maintenance. Light machine weight, non-marking tyres, and quick battery charging allows for quick use of the QuickStock™ lift on most surfaces and applications.

GENIE® QUICKSTOCK™ WAREHOUSE VERSION

The Genie® QuickStock™ lift Warehouse version includes the same features and benefits of the retail package, with the exception of the dual flashing beacons and the obstruction sensing pad.



QUICKSTOCK™ MODELS AVAILABLE

QS™-12

QS™-15

QS™-20

OPTIONS

FOR GENIE® RUNABOUT™ AND QUICKSTOCK™ MODELS

GR™-12 GR™-15 GR™-20 GR™-20J GR™-26J GRC™-12 QST™-12R QST™-15R QST™-20R QST™-12W QST™-15W QST™-20W

PLATFORM												
STOCK PICKER™ PLATFORM									S	S	S	S
DUAL BIKE HOOKS									O	O	O	O
FLUORESCENT TUBE CADDY	O	O	O				O					
AC POWER TO PLATFORM				O	O							
AIRLINE TO PLATFORM				O	O							
PLATFORM WORK LIGHTS				O	O							
WARNING												
MOTION ALARM	O	O	O				O	O	O	O	O	O
DUAL FLASHING BEACON	O	O	O				O	S	S	S		
FLASHING BEACON				O	O							
AUTOMOTIVE-STYLE HORN	O	O	O				O					
OBSTRUCTION SENSING PAD								S	S	S		
POWER												
800 WATT INVERTER	O	O	O				O					
MAINTENANCE-FREE BATTERY	O	O	O				O	S	S	S	S	S

O = OPTION S = STANDARD

QUICKSTOCK™ BICYCLE HOOKS

Optional dual bicycle hooks are available on all QuickStock™ units.



QUICKSTOCK™ FLASHING BEACON

Available only on the Retail version, the dual flashing beacons alert customers when the QuickStock™ lift is in operation.



RUNABOUT™ WITH JIB
Optional flashing beacons



QUICKSTOCK™ CHARGER CORD

A standard 1.8 m (6 ft) long charger cord eliminates the need for an additional extension cord and easily allows the QuickStock™ to be charged at the end of a long workday.



RUNABOUT™ WITH JIB
AC power to platform (with ground fault interrupt system)

A PLATFORM FOR EVERY JOB

Choose from a variety of sizes, shapes and materials to create just the right lift solution for your specific application needs.

AWP™, IWP™ AND RUNABOUT™ PLATFORM OPTIONS



STANDARD PLATFORM WITH SLIDING MIDRAIL
69 x 66 cm (27 x 26 in)
An excellent general-purpose platform.



GATED STANDARD PLATFORM
69 x 66 cm (27 x 26 in)
Provides "step in" entry.



GATED NARROW PLATFORM
66 x 51 cm (26 x 20 in)
For access through standard ceiling tile and other small openings.



STANDARD FIBREGLASS PLATFORM*
74 x 67 cm (29 x 26.5 in)
A general-purpose fiberglass platform designed for containing tools and materials.



SLIDING MID-RAIL EXTENSION DECK PLATFORM
140 x 75 cm (55 x 29.5 in)
Provides 51 cm (20 in) of horizontal outreach and a larger work area within the platform.

AWP FAMILY PLATFORM OPTIONS	AWP™	IWP™	DPL™	GR™	GR™-J	GRC™	QST™
STANDARD PLATFORM WITH SLIDING MID-RAIL	S	S		S			
STOCK PICKER WITH DUAL ENTRY							S
GATED STANDARD PLATFORM	O	O		O			
GATED NARROW PLATFORM	O	O					
STANDARD FIBREGLASS PLATFORM*	O	O					
DPL™ PLATFORM 70 X 183 CM (27.5 X 72 IN)			S				
GATED EXTENSION DECK				O			
SLIDING MID-RAIL EXTENSION DECK				O			
STEEL PLATFORM & EXTENSION DECK WITH SWING GATE						S	
STEEL PLATFORM WITH SLIDING MID-RAIL 90 X 75 CM (35.5 X 29.5 IN)					S		

O = OPTION S = STANDARD




STEEL PLATFORM AND EXTENSION DECK WITH SWING GATE
140 x 75 cm (55 x 29.5 in) provides 44 cm (17.5 in) of horizontal outreach and allows up to two people in the platform.

* FIBREGLASS PLATFORMS DO NOT PROVIDE PROTECTION FROM ELECTRIC SHOCK.

SPECIFICATIONS AERIAL WORK PLATFORMS

MODEL	WORKING HEIGHT		WIDTH		PLATFORM HEIGHT		LIFT CAPACITY		WEIGHT** (AC/DC STANDARD BASE)	
	Metric	US	Metric	US	Metric	US	Metric	US	Metric	US
AERIAL WORK PLATFORMS										
AWP™-20S	8.12 m	26 ft 1 in	.74 m	2 ft 5 in	6.12 m	20 ft 1 in	159 kg	350 lbs	307/347 kg	677/766 lbs
AWP™-25S	9.57 m	30 ft 10 in	.74 m	2 ft 5 in	7.57 m	24 ft 10 in	159 kg	350 lbs	330/371 kg	727/817 lbs
AWP™-30S	11.00 m	35 ft 6 in	.74 m	2 ft 5 in	9.00 m	29 ft 6 in	159 kg	350 lbs	352/393 kg	777/867 lbs
AWP™-36S	13.10 m	42 ft 5 in	.74 m	2 ft 5 in	11.10 m	36 ft 5 in	159 kg	350 lbs	461/502 kg	1,017/1,107 lbs
AWP™-40S	14.29 m	46 ft 4 in	.74 m	2 ft 5 in	12.29 m	40 ft 4 in	136 kg	300 lbs	472/513 kg	1,040/1,130 lbs
INDUSTRIAL WORK PLATFORMS										
IWP™-20S	8.24 m	26 ft 6 in	.81 m	2 ft 8 in	6.24 m	20 ft 6 in	159 kg	350 lbs	565/610 kg	1,245/1,345 lbs
IWP™-25S	9.44 m	30 ft 5 in	.81 m	2 ft 8 in	7.44 m	24 ft 5 in	159 kg	350 lbs	585/630 kg	1,290/1,390 lbs
IWP™-30S	11.00 m	35 ft 6 in	1.02 m*	3 ft 4 in*	9.00 m	29 ft 6 in	159 kg	350 lbs	649/694 kg***	1,430/1,530 lbs
DUAL PERSONNEL LIFTS										
DPL™-25S	9.72 m	31 ft 4 in	.80 m	2 ft 7.5 in	7.72 m	25 ft 4 in	340 kg	750 lbs	622/672 kg	1,371/1,481 lbs
DPL™-30S	11.14 m	36 ft	.80 m	2 ft 7.5 in	9.14 m	30 ft	340 kg	750 lbs	669/718 kg	1,474/1,584 lbs
DPL™-35S	12.62 m	40 ft 10 in	.80 m	2 ft 7.5 in	10.62 m	34 ft 10 in	272 kg	600 lbs	746/796 kg	1,645/1,755 lbs
SELF-PROPELLED AERIAL WORK PLATFORMS (GENIE® RUNABOUT™)										
GR™-12	5.48 m	17 ft 5 in	.75 m	2 ft 5.5 in	3.48 m	11 ft 5 in	227 kg	500 lbs	717 kg	1,581 lbs
GR™-15	6.47 m	20 ft 8 in	.75 m	2 ft 5.5 in	4.47 m	14 ft 8 in	227 kg	500 lbs	994 kg	2,192 lbs
GR™-20	8.07 m	25 ft 11 in	.80 m	2 ft 7.5 in	6.07 m	19 ft 11 in	159 kg	350 lbs	1,112 kg	2,451 lbs
SELF-PROPELLED AERIAL WORK PLATFORMS WITH JIB (GENIE® RUNABOUT™ WITH JIB)										
GR™-20J	7.70 m	25 ft 3 in	.99 m	3 ft 3 in	5.70 m	18 ft 8 in	200 kg	440 lbs	2,250 kg	4,960 lbs
GR™-26J	9.90 m	32 ft 6 in	.99 m	3 ft 3 in	7.90 m	25 ft 11 in	200 kg	440 lbs	2,650 kg	5,842 lbs
GENIE® RUNABOUT™ CONTRACTOR										
GRC™-12	5.66 m	18 ft	.75 m	2 ft 5.5 in	3.66 m	12 ft	227 kg	500 lbs	948 kg	2,090 lbs
GENIE® QUICKSTOCK™ (RETAIL & WAREHOUSE MODELS)										
QS™-12	5.48 m	17 ft 5 in	.75 m	2 ft 5.5 in	3.48 m	11 ft 5 in	227 kg	500 lbs	717/730 kg	1,581/1,609 lbs
QS™-15	6.47 m	20 ft 8 in	.75 m	2 ft 5.5 in	4.47 m	14 ft 8 in	227 kg	500 lbs	994/1,007 kg	2,192/2,220 lbs
QS™-20	8.07 m	25 ft 11 in	.80 m	2 ft 7.5 in	6.07 m	19 ft 11 in	159 kg	350 lbs	1,112/1,124 kg	2,451/2,479 lbs

*Wide Base / **Weight will vary depending on options and/or country standards / ***Wide base

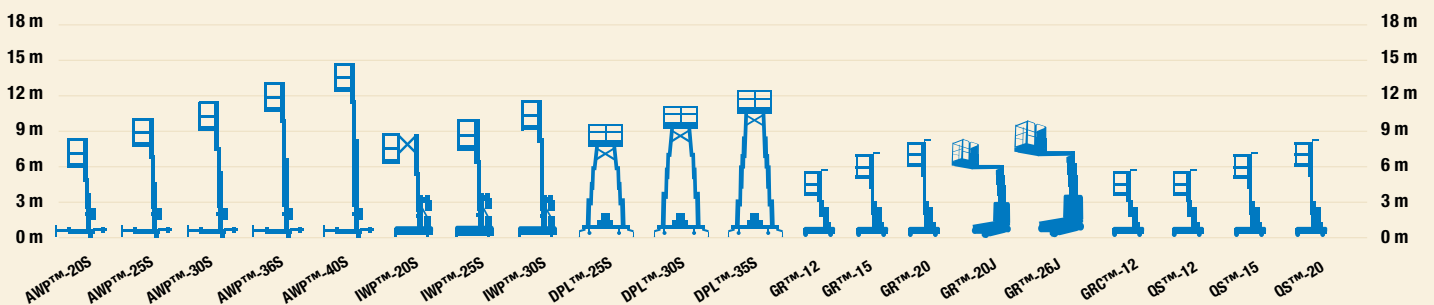



GENIE HAS YOU COVERED

Genie
A TEREX BRAND

United Kingdom

The Maltings
Wharf Road
Grantham NG31 6BH
UK
Tél. + 44 (0) 1476 584333
Fax + 44 (0) 1476 584334

Enquiries

Tel: +31 165 519 361
Fax: +31 165 511 148

United States

18340 NE 76th Street
P.O. Box 97030
Redmond, WA
U.S.A. 98073-9730

Tel +1 (425) 881 1800
Fax +1 (425) 883 3475

Distributed by:

Email AWP-InfoEurope@terex.com

WEB www.genieindustries.com

Effective date: August, 2010. Product specifications are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, expressed or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation, Genie Industries, Inc. and/or their subsidiaries in the U.S.A. and many other countries and all rights are reserved. Terex is a Registered Trademark of Terex Corporation in the U.S.A. and many other countries. Genie is a Registered Trademark of Genie Industries, Inc in the U.S.A. and many other countries. Genie is a Terex Company. Copyright 2010 Terex Corporation