



MATERIAL LIFTS

CUSTOMERS FIRST. ALWAYS.

PARTNERING FOR SUCCESS

Our dedication to lifting you higher extends well beyond the physical reach of our products. We thrive on building satisfying customer relationships founded on the idea of partnership. Because you, our customer, are at the centre of everything we do.

Since 1966, we've been developing products to solve your work site challenges — and that process never ends. Our team of product managers and engineers uses your input to design new products, featuring the latest technology to meet your changing needs. Then we manufacture those products to stringent standards that help increase quality, lower costs and give you exceptional value for years to come.

PROVIDING SUPERIOR VALUE

Our commitment doesn't end with the sale. Our dedicated service teams are available to provide support when you need it most. Our extensive parts network ships most parts within 24 hours. Simply put, we're always working to help maximize your "up time" so you can be more successful.

Genie is driven by one goal: doing the right thing, at the right time for our customers. That's not just what we do; it's who we are. So tell us what you need. We're listening.



Genie
A TEREX BRAND

SETTING THE STANDARD

Genie manufactures some of the most advanced, highest-valued lift equipment in the industry. Genie distinctive blue lifts set the standard for performance and durability — not to mention support from people who understand your business.



PORTABLE PRODUCTIVITY

Since the introduction of the original Genie® Hoist in 1966, Genie has been developing sound lifting products for the workplace. Genie® lightweight, low-cost material lifts are designed to enhance your productivity with highly portable solutions for a wide variety of applications.

All Genie® material lifts are easy for one person to set up, operate and transport in a standard pickup or service truck. Plus, a wide variety of options and accessories make them extremely adaptable to fit your specific needs. With sturdy construction and reliable performance, Genie® material lifts are an excellent value for a virtually unlimited number of indoor and outdoor uses.

Genie Industries began in 1966 with the introduction of the Genie® Hoist — the product that launched thousands of lifts.

THE ORIGINAL PORTABLE HOIST

Genie Industries began in 1966 with the original Genie® Hoist — a unique portable pneumatic lift that was so successful, it launched the development of a full range of material hoists and aerial work platforms. Today's Genie® Super Hoist™ continues the legacy of innovation with an incredibly compact, easy-to-use design. This portable telescoping pneumatic hoist uses CO₂ or compressed air to lift up to 136 kg (300 lbs) to heights of 3.8 m (12 ft 5.6 in) or up to 113 kg (250 lbs) up to 5.6 m (18 ft 4.5 in).

FLEXIBLE POWER

The hoist is powered by either CO₂ or compressed air and provides approximately 80 to 90 lifts from a single tank of CO₂. The “one size fits all” bottle mounting bracket accepts any common CO₂ bottle size. A 9 kg (20 lb) CO₂ tank is also available as an accessory. The hose stretches 4.87 m (16 ft) for added mobility and stores around brackets underneath the platform when not in use.



EASY OPERATION

Up and down functions, including the dump valve, can all be activated from the patented pistol-grip control handle, which clips to a storage button on the side of the cylinder when not in use.

Lightweight, compact and portable, this telescoping pneumatic hoist allows an individual to lift heavy loads into place for installation.



PLATFORM CRADLE PACKAGE

Available as an accessory to handle odd-shaped items.

VERSATILE APPLICATIONS

Lift, position and install a wide variety of materials, including metal air ducts, overhead sprinklers/plumbing, plaster walls and ceiling panels, and electrical fixtures.

QUICK, EASY SETUP

Sets up in seconds — no special tools required. The one-piece platform attaches to the cylinder with a twist of the wrist. Legs fold out from the base, and the lock mechanism keeps each leg out for use (or up for storage). Casters also lock in place with the touch of a toe.

LIGHTWEIGHT, COMPACT DESIGN

The compact size and weight allow one person to lift and move heavy loads, yet quickly move from job to job. The hoist is completely portable and easy to store and transport. It's so lightweight and compact, it fits in the boot of most cars.



GENIE® SUPER HOIST™ MODELS AVAILABLE

GH™ 3.8

GH™ 5.6

ROUTINE LIFTING MADE EASY

With the Genie® Load Lifter™, one person can easily lift, move and position heavy loads — helping to increase productivity. Compact and portable, it lifts up to 91 kg (200 lbs) to a height of 1.7 m (5 ft 7 in) and stores easily with dimensions of 1.1 m x 38 cm x 52 cm (45 x 15 x 20.5 in). Use it to lift and move everything from computer and electronic equipment to small appliances or manufactured parts. It can even function as a work table.



PORTABLE DESIGN

The Load Lifter™ folds for compact storage — no tools required — and loads easily into a pickup truck for transport. Weighing in at 29 kg (65 lbs), it features durable, lightweight aluminium construction with a corrosion-resistant finish and is easy for one person to carry and manoeuvre.



CONVENIENT LOADING

The beveled aluminium platform allows easy loading and unloading, and field-installable foot brakes are available for additional security.



The compact choice for handling repetitive light-duty lifting.



NON-MARKING WHEELS

Non-marking “mold-on” rear wheels are standard to prevent marking or damaging floors.



STAIR HANDLING

Built-in stair glides above the rear tyres provide easy handling over stairs and curbs.



EASY MANOEUVRING

Optional front-swivel, non-marking casters can also be attached to the front of the base for easy manoeuvring.



FAST, QUIET LIFT/WINCH SYSTEM

The quiet high-speed reversible winch quickly lifts and lowers heavy loads to improve productivity and minimize work disruption. High-strength aircraft-quality cable is vinyl-coated to prevent corrosion and fraying for longer life, and the vinyl-coated crossbar helps keep hands clean when using the unit.

LOAD LIFTER™ MODEL AVAILABLE

LL™

CUSTOMIZED VERSATILITY

With three base models and many accessories to choose from, the Genie® Lift™ is ideal for all your material handling needs. From the GL™-4 that lifts up to 227 kg (500 lbs) to 1.80 m (5 ft 11 in) to the GL™-12 that lifts up to 159 kg (350 lbs) to heights up to 4.2 m (13 ft 9.5 in), the Genie® Lift™ is perfect for a variety of jobs. The Genie® Lift™ is well suited for shipping/receiving, lifting heavy material to or from shelves, installing and repairing HVAC components, lifting and moving automotive parts, and other manufacturing applications. Compact and versatile, this unit is also easily loaded in a pickup truck for convenient transport.



STRADDLE BASE

Adjustable base legs straddle loads or fixed objects up to 91 cm (36 in) wide. Perfect for lifting small pallets, appliances and other bulky objects. (GL™-4, GL™-8, GL™-10, GL™-12)



COUNTERWEIGHT BASE

Short leg length lets you get close to your load. Excellent for accessing loads on countertops or shelves above fixed objects. Designed for use on level surfaces. (GL™-4, GL™-8, GL™-10)

STANDARD BASE

Compact design allows you to lift and manoeuvre in congested work areas. Great for general lifting and material delivery. Low loading height. (GL™-4, GL™-8)

Choose from three bases to customize the Genie® Lift™ for your job — it can be used as a hand truck, forklift or dolly for maximum versatility and value.



COMPACT, MANOEUVRABLE DESIGN

The telescoping aluminium frame design makes the unit extremely compact. Plus, the durable steel forks can be reversed for greater flexibility. In addition, the winch handle is reversible, and a hold-down mechanism secures the carriage for easy transport and storage.



WHEELS AND CASTERS

20 cm (8 in) non-marking rear wheels and 5 cm (2 in) dual-wheel, front-swivel casters are standard on the standard and straddle base models.

12 cm (5 in) rear-swivel casters with side brakes and fixed 10 cm (4 in) front wheels are standard on the counterweight base model. Optional pneumatic rear tyres and foot release brake available (standard and straddle base only).



PLATFORM FOR LOAD HANDLING

The optional load platform fits easily over forks to handle odd-shaped loads and can also be used as a portable work table.



LADDER FOR INCREASED ACCESS

Attaching the sturdy aluminum ladder accessory makes your Genie® Lift™ a combination lift truck and stepladder for increased access to lifting and installation tasks. (Available on standard and straddle base models; not available with electric winch option.) The standard winch can be used while the ladder is in use or stowed.



BOOM FOR ADDED VERSATILITY

The boom option turns your Genie® Lift™ into a vertical crane or hoist capable of lifting 95 to 227 kg (210 to 500 lbs) with up to 51 cm (20 in) of reach.

GENIE® LIFT™ MODELS AVAILABLE

GL™-4 | GL™-8 | GL™-10 | GL™-12

EXTREME DURABILITY

Ideal for construction firms and all types of contractors, the Genie® Superlift Contractor™ is well suited for industrial applications and HVAC installations. This unit can be easily operated by one person and can lift, lower and move loads up to 295 kg (650 lbs) to heights of up to 7.32 m (24 ft).

EASY TRANSPORT AND SETUP

Glide rails allow one person to easily load or unload the unit and lift it in or out of a pickup truck. Rear transport wheel assembly also facilitates manoeuvring on uneven surfaces. Quick setup requires no tools.



STOWED POSITION

The heavy duty patented telescoping mast system stows in a compact position. Legs fold up and attachments are removable for easy storage.

QUIET TWO-SPEED WINCH OPTION

Shift gears “on the fly” and lift loads faster with Genie’s exclusive, constant mesh two-speed manual winch. It provides the ability to change gears without removing or re-attaching handles and has no loose parts.



Designed specifically for the construction industry, these heavy-duty units are extremely durable yet also lightweight and portable.

SIX INTERCHANGEABLE ACCESSORIES

A variety of load handling accessories make this unit extremely versatile.



STANDARD FORKS accommodate various loads for versatile lifting. Get an additional 51 cm (20 in) of lift by turning over and re-pinning the forks.



ADJUSTABLE FORKS widen from 28 to 76 cm (11 to 30 in) to accommodate diverse loads.



BOOM OPTION transforms your lift into a mobile, vertical crane or hoist to position tooling fixtures, circuit breakers, engines and more.



LOAD PLATFORM fits over the forks to handle odd-sized or heavy objects — no tools required for installation.



PIPE CRADLE helps hold odd-shaped items in place for easy lifting.



FORK EXTENSIONS insert onto standard forks for an additional 64 cm (25 in) of length.



SUPPORT FOR HEAVY LOADS

The captive stabilizer with patented “locking system” provides additional lateral support for heavy loads (standard on SLC™-18 and SLC™-24).



SUPERLIFT CONTRACTOR™ MODELS AVAILABLE

SLC™-12

SLC™-18

SLC™-24

POWERFUL CHOICES

The Genie® Superlift™ Advantage is a manually operated material lift with multiple base, winch and load handling options to create just the lift you need. The compact, portable design rolls through standard single doorways and loads easily into a pickup truck. It also lifts up to 454 kg (1,000 lbs) of material up to 3.49 m (11 ft 5.5 in) and up to 295 kg (650 lbs) to heights of up to 7.94 m (26 ft .5 in). With so many choices, the versatile Genie® Superlift™ Advantage helps you maximize productivity and value for your money.



STRADDLE BASE

Versatile and adjustable, this base is perfect for wide loads and narrow doorways. It straddles loads from 80 to 127 cm (31.5 to 50 in) wide and easily handles pallets up to 122 cm (48 in) wide. Flat forks allow ground level loading. (SLA™-5, SLA™-10, SLA™-15)

STANDARD BASE

This field-proven design provides dependable performance with a welded steel base for extra support. Stabilizers are standard on 6.1 and 7.6 m (20 and 25 ft) models. There are no loose parts. (SLA™-5, SLA™-10, SLA™-15, SLA™-20, SLA™-25)



Choose base, mast height, winch speed and load handling attachments to configure the exact material lift for your worksite.

EASY TO MANOEUVRE, LOAD AND STORE

The unit sets up quickly without any tools and is ready to go to work in seconds. It rolls through standard single doorways in the upright position — no need to remove the load or tilt back the lift. The rear transport wheel assembly also allows manoeuvrability on uneven surfaces. Legs fold up and attachments are removable for easy storage and loading, plus a hold-down bar secures the mast assembly during transport.



SEVEN LOAD HANDLING ATTACHMENTS

Interchangeable load handling attachments handle a large variety of workloads, so you can design your lift to meet your needs.



STANDARD FORKS accommodate a variety of general loads. Get an additional 51 cm (20 in) of lift by turning over and re-pinning the forks.



ADJUSTABLE FORKS widen from 29 to 76 cm (11.5 to 30 in) to accommodate diverse loads.



FLAT FORKS, which widen from 41 to 79 cm (16 to 31 in) to provide proper support, allow you to easily lift your load off of flat surfaces.



FORK EXTENSIONS insert onto standard forks for an additional 64 cm (25 in) of length.



LOAD PLATFORM fits over the forks to handle odd-sized or heavy objects — no tools required for installation.



BOOM option transforms your lift into a mobile, vertical crane or hoist to position tooling fixtures, circuit breakers, engines and more.



PIPE CRADLE helps hold odd-shaped items in place for easy lifting.



PATENTED TELESCOPING MAST SYSTEM Heavy-duty design provides compactness, strength and rigidity.



SUPPORT FOR HEAVY LOADS The captive stabilizer with patented “locking system” provides additional lateral support for heavy loads (standard on SLA™-20 and SLA™-25).



WINCH OPTIONS The standard one-speed winch incorporates a silent ratchet system. A two-speed winch upgrade allows you to shift gears “on the fly” to lift loads faster without removing or re-attaching the handles.

SUPERLIFT™ ADVANTAGE MODELS AVAILABLE

SLA™-5 | SLA™-10 | SLA™-15 | SLA™-20 | SLA™-25

EXCELLENT SUPPORTING PERFORMANCE

The Genie® Super Tower™ is the industry standard for theatrical productions and entertainment events. It telescopes lighting, sound systems and scenery weighing up to 363 kg (800 lbs) and can lift to heights up to 7.94 m (26 ft .5 in). And the standard flat black anodized finish blends in perfectly backstage, making it virtually invisible to audiences. It's also compact and portable for easy transport and storage.



EASY TRANSPORT AND STORAGE

The compact stowed position makes the Super Tower™ easy to move through doors and load on trucks with no bulky base to get in the way. Stowed dimensions are 56 cm (22 in) by 64 cm (25.25 in).



OPTIONS AND ACCESSORIES

TWO-SPEED WINCH OPTION allows you to shift gears during operation.

LOAD PLATFORM fits over standard forks with no tools required to handle heavy or odd-shaped objects.

FORK EXTENSIONS insert onto standard forks for additional 64 cm (25 in) length.

QUICK, SIMPLE SETUP

Just install the outriggers and set the leveling jacks.

SUPER TOWER™ MODELS AVAILABLE

ST™-20 | ST™-25

**The ideal choice for lifting and supporting
lighting/sound systems and stage scenery while blending in backstage.**

SPECIFICATIONS MATERIAL LIFTS

MODEL	LIFTING HEIGHT		LIFTING CAPACITY		WEIGHT *	
	Metric	US	Metric	US	Metric	US
SUPER HOIST™						
GH™ 3.8	3.80 m	12 ft 5.6 in	136 kg	300 lbs	34 kg	75 lbs
GH™ 5.6	5.60 m	18 ft 4.5 in	113 kg	250 lbs	37 kg	82 lbs

LOAD LIFTER™						
LL™	1.70 m	5 ft 7 in	91 kg	200 lbs	26 kg	58 lbs

GENIE® LIFT™						
GL™-4	1.80 m	5 ft 11 in	227 kg	500 lbs	57 kg	126 lbs
GL™-8	3.06 m	10 ft .5 in	181 kg	400 lbs	66 kg	145 lbs
GL™-10	3.56 m	11 ft 8 in	159 kg	350 lbs	68 kg	149 lbs
GL™-12	4.20 m	13 ft 9.5 in	159 kg	350 lbs	70 kg	154 lbs

Capacities listed are with a 30 cm (12 in) load centre.

SUPERLIFT CONTRACTOR™						
SLC™-12	3.94 m	12 ft 11 in	295 kg	650 lbs	102 kg	225 lbs
SLC™-18	5.64 m	18 ft 6 in	295 kg	650 lbs	139 kg	307 lbs
SLC™-24	7.32 m	24 ft	295 kg	650 lbs	157 kg	347 lbs

Capacities listed are with a 36 cm (14 in) load centre.


SUPERLIFT™ ADVANTAGE						
SLA™-5	2.0 m	6 ft 7 in	454 kg	1,000 lbs	98 kg	215 lbs
SLA™-10	3.49 m	11 ft 5.5 in	454 kg	1,000 lbs	118 kg	260 lbs
SLA™-15	4.98 m	16 ft 4 in	363 kg	800 lbs	151 kg	333 lbs
SLA™-20	6.46 m	21 ft 2.5 in	363 kg	800 lbs	184 kg	405 lbs
SLA™-25	7.94 m	26 ft .5 in	295 kg	650 lbs	204 kg	450 lbs

Capacities listed are with a 46 cm (18 in) load centre.

SUPER TOWER™						
ST™-20	6.46 m	21 ft 2.5 in	363 kg	800 lbs	230 kg	507 lbs
ST™-25	7.94 m	26 ft .5 in	295 kg	650 lbs	252 kg	555 lbs

Capacities listed are with a 36 cm (14 in) load centre.

*Weight will vary depending on options and/or country standards

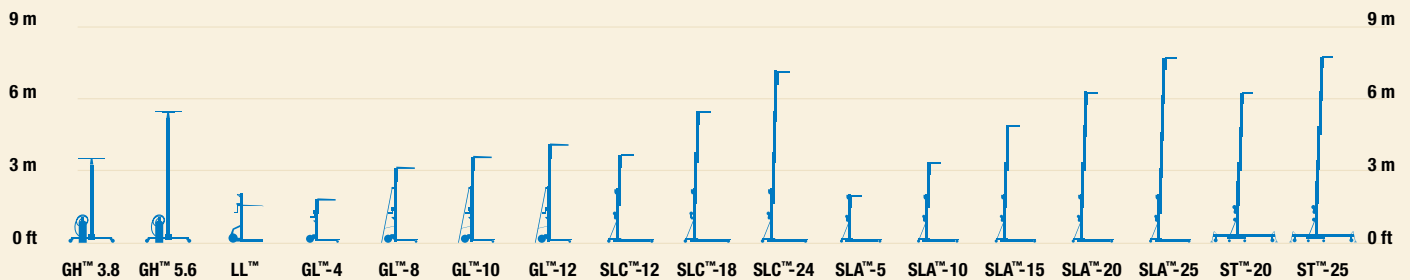



GENIE HAS YOU COVERED



United Kingdom

The Maltings
Wharf Road
Grantham NG31 6BH
UK
Tél. + 44 (0) 1476 584333
Fax + 44 (0) 1476 584334

Enquiries

Tel: +31 165 519 361
Fax: +31 165 511 148

United States

18340 NE 76th Street
P.O. Box 97030
Redmond, WA
U.S.A. 98073-9730

Tel +1 (425) 881 1800
Fax +1 (425) 883 3475

Distributed by:

WEB www.genieindustries.com

Email AWP-InfoEurope@terex.com

Effective date: March, 2010. Product specifications are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, expressed or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation, Genie Industries, Inc. and/or their subsidiaries in the U.S.A. and many other countries and all rights are reserved. Terex is a Registered Trademark of Terex Corporation in the U.S.A. and many other countries. Genie is a Registered Trademark of Genie Industries, Inc in the U.S.A. and many other countries. Genie is a Terex Company. Copyright 2010 Terex Corporation

Part No. B109306UK. Effective date 03/10