


SPECIFICATIONS

ARTICULATING Z™-BOOMS

MODEL	WORKING HEIGHT		WIDTH		HORIZONTAL REACH		UP & OVER CLEARANCE		LIFT CAPACITY	
	US	Metric	US	Metric	US	Metric	US	Metric	US	Metric
NARROW ARTICULATING Z™-BOOMS										
Z™-30/20N	36 ft	11.14 m	3 ft 11 in	1.19 m	21 ft 5 in	6.53 m	12 ft 8 in	3.86 m	500 lbs	227 kg
Z™-30/20N RJ	35 ft 2 in	10.89 m	3 ft 11 in	1.19 m	20 ft 6 in	6.25 m	12 ft 8 in	3.86 m	500 lbs	227 kg
Z™-34/22N	40 ft 6 in	12.52 m	4 ft 10 in	1.47 m	22 ft 3 in	6.78 m	15 ft 2 in	4.62 m	500 lbs	227 kg
Z™-40/23N	46 ft 5 in	14.32 m	4 ft 11 in	1.50 m	22 ft 8 in	6.91 m	21 ft 3 in	6.48 m	500 lbs	227 kg
Z™-40/23N RJ	46 ft 5 in	14.32 m	4 ft 11 in	1.50 m	22 ft 8 in	6.91 m	21 ft 3 in	6.48 m	500 lbs	227 kg
DC AND BI-ENERGY ARTICULATING Z™-BOOMS										
Z™-34/22 DC	40 ft 6 in	12.52 m	5 ft 8 in	1.73 m	22 ft 3 in	6.78 m	15 ft	4.57 m	500 lbs	227 kg
Z™-34/22 BI-ENERGY	40 ft 6 in	12.52 m	5 ft 8 in	1.73 m	22 ft 3 in	6.78 m	15 ft	4.57 m	500 lbs	227 kg
Z™-45/25 DC	51 ft 6 in	15.87 m	5 ft 10.3 in	1.79 m	25 ft	7.62 m	23 ft 1 in	7.04 m	500 lbs	227 kg
Z™-45/25J DC	51 ft 8 in	15.92 m	5 ft 10.3 in	1.79 m	25 ft 1 in	7.65 m	22 ft 1 in	6.73 m	500 lbs	227 kg
Z™-45/25 BI-ENERGY	51 ft 6 in	15.87 m	5 ft 10.3 in	1.79 m	25 ft	7.62 m	23 ft 1 in	7.04 m	500 lbs	227 kg
Z™-45/25J BI-ENERGY	51 ft 8 in	15.92 m	5 ft 10.3 in	1.79 m	25 ft 1 in	7.65 m	22 ft 1 in	6.73 m	500 lbs	227 kg
ENGINE-POWERED ARTICULATING Z™-BOOMS										
Z™-34/22 IC (2 WD)	40 ft 6 in	12.52 m	5 ft 8 in	1.73 m	22 ft 3 in	6.78 m	14 ft 11 in	4.55 m	500 lbs	227 kg
Z™-34/22 IC (4 WD)	40 ft 10 in	12.62 m	6 ft 1 in	1.85 m	22 ft 3 in	6.78 m	15 ft	4.57 m	500 lbs	227 kg
Z™-45/25 IC NARROW	51 ft 6 in	15.87 m	5 ft 10.3 in	1.79 m	25 ft	7.62 m	23 ft 1 in	7.04 m	500 lbs	227 kg
Z™-45/25J IC NARROW	51 ft 9 in	15.94 m	5 ft 10.3 in	1.79 m	25 ft 1 in	7.65 m	22 ft 1 in	6.73 m	500 lbs	227 kg
Z™-45/25 RT	51 ft 11 in	16.00 m	7 ft 6 in	2.29 m	25 ft	7.62 m	23 ft 6 in	7.16 m	500 lbs	227 kg
Z™-45/25J RT	52 ft 2 in	16.07 m	7 ft 6 in	2.29 m	25 ft 1 in	7.65 m	23 ft 6 in	7.16 m	500 lbs	227 kg
Z™-60/34	66 ft 4 in	20.39 m	8 ft 1 in	2.46 m	36 ft 3 in	11.05 m	27 ft	8.23 m	500 lbs	227 kg
Z™-80/60	84 ft	25.77 m	8 ft 2 in	2.49 m	60 ft	18.29 m	29 ft	8.83 m	500 lbs	227 kg
Z™-135/70	141 ft	43.15 m	8 ft 1 in*	2.46 m*	69 ft 9 in	21.26 m	75 ft 6 in	23.01 m	600 lbs	272 kg

*Axles retracted

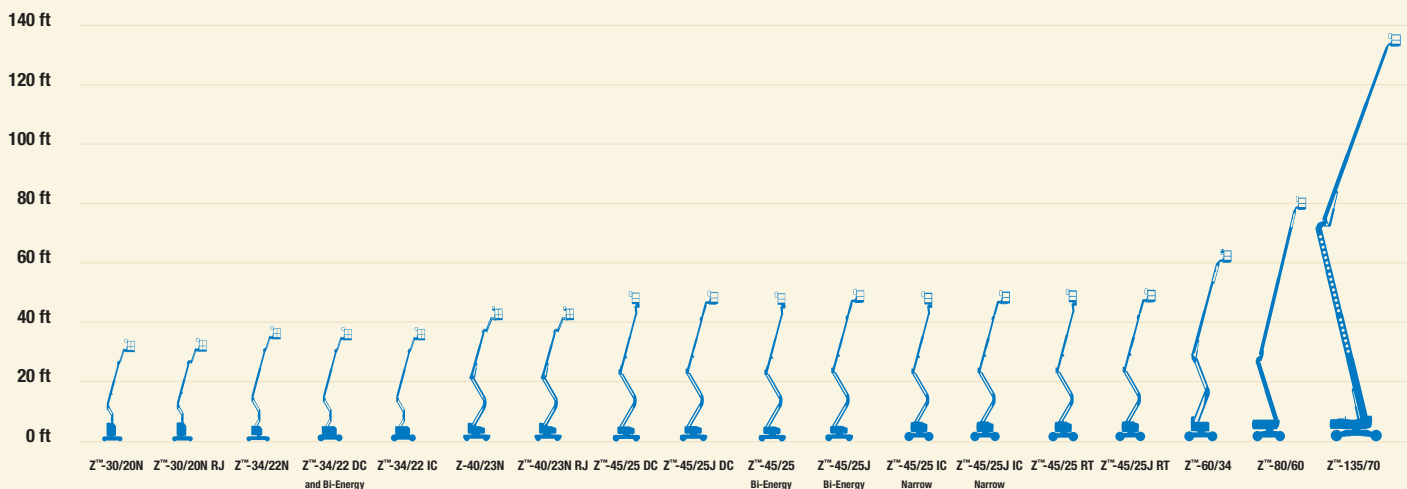

SPECIFICATIONS

TELESCOPIC S™-BOOMS

MODEL	WORKING HEIGHT		WIDTH		HORIZONTAL REACH		LIFT CAPACITY	
	US	Metric	US	Metric	US	Metric	US	Metric
STICK TELESCOPIC S™-BOOMS								
S™-40	46 ft	14.20 m	7 ft 6 in	2.30 m	31 ft 8 in	9.65 m	500 lbs	227 kg
S™-45	51 ft	15.72 m	7 ft 6 in	2.30 m	36 ft 8 in	11.18 m	500 lbs	227 kg
S™-60	66 ft	20.30 m	8 ft 2 in	2.49 m	50 ft 10 in	15.48 m	500 lbs	227 kg
S™-60 TRAX	66 ft 2 in	20.34 m	8 ft 6 in	2.59 m	50 ft 10 in	15.48 m	500 lbs	227 kg
S™-60 HC	64 ft 4 in	19.78 m	8 ft 2 in	2.49 m	50 ft 10 in	15.48 m	750/1,250 lbs**	340/567 kg**
S™-65	71 ft	21.80 m	8 ft 2 in	2.49 m	56 ft 2 in	17.10 m	500 lbs	227 kg
S™-65 TRAX	71 ft 2 in	21.86 m	8 ft 6 in	2.59 m	56 ft 2 in	17.10 m	500 lbs	227 kg
S™-80	86 ft	26.38 m	8 ft*	2.44 m*	72 ft 5 in	22.07 m	500 lbs	227 kg
S™-85	91 ft	27.90 m	8 ft*	2.44 m*	77 ft 5 in	23.60 m	500 lbs	227 kg
SUPER TELESCOPIC S™-BOOMS								
S™-100	106 ft	32.48 m	8 ft 2 in*	2.49 m*	75 ft	22.86 m	750 lbs	340 kg
S™-105	111 ft	34.00 m	8 ft 2 in*	2.49 m*	80 ft	24.38 m	500 lbs	227 kg
S™-120	126 ft	38.58 m	8 ft 2 in*	2.49 m*	75 ft	22.86 m	750 lbs	340 kg
S™-125	131 ft 2 in	40.15 m	8 ft 2 in*	2.49 m*	80 ft	24.38 m	500 lbs	227 kg

* Axles retracted

** Maximum outreach zone / maximum capacity zone

