


# ZOOMLION

## ROUGH TERRAIN SCISSOR LIFTS

### ZS1023RT/ZS1323RT

Comply with CE/ANSI/Standard

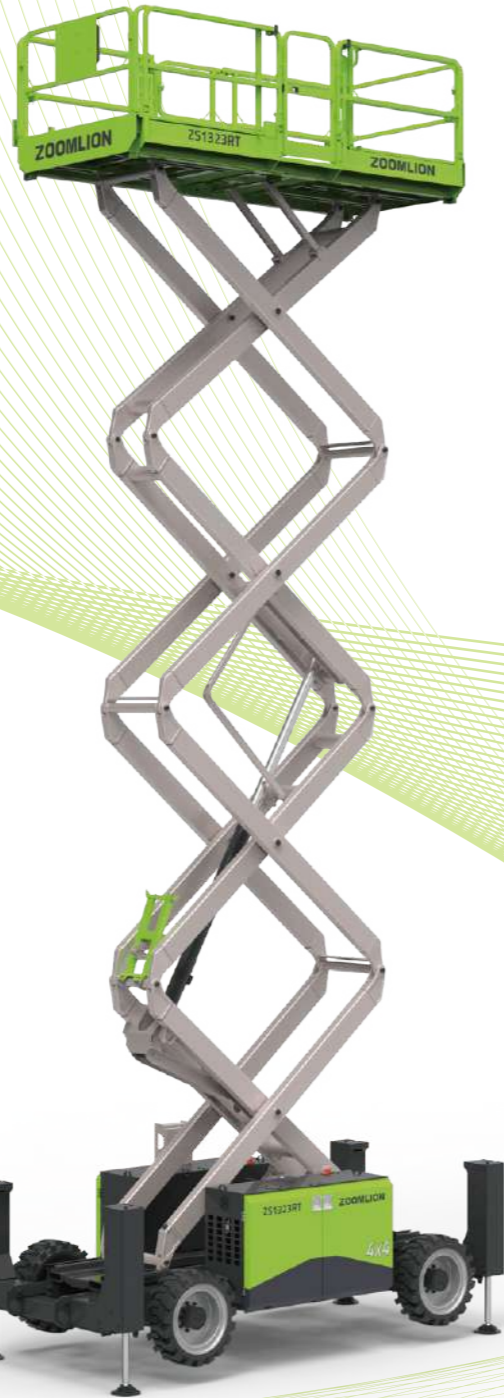

## HIGHLIGHTS

### High Performance

- ▶ Strong capacity of 680kg (1500lb) with high working efficiency;
- ▶ 4WD and axle oscillation provide great off-road capability;
- ▶ One-Click leveling function;
- ▶ Bilateral power system effective to lower noise.

### Cost Effectiveness

- ▶ Knuckles lubrication-free and maintenance-free;
- ▶ Swing-out tray easy to service.

## FEATURES

### Standard Features

Proportional controls	Extension deck (bidirectional)
All motion alarm	Scissor maintenance prop
Fold-down handrails	AC power to platform
Flashing beacon	Autobrake system
Self-closing entry gate	Emergency descent system
Load sensing system	Emergency stop button
Autobrake system	On-board diagnostic
Emergency descent system	Over tilt protective system
Emergency stop button	Horn
On-board diagnostic	Hour meter
Over tilt protective system	Extension deck (bidirectional)
Horn	Scissor maintenance prop
Hour meter	AC power to platform




### Accessories & Options

- ▶ Platform work lights
- ▶ Airline to platform

ACCESS WITH ZOOMLION GREEN



Model	ZS1023RT		ZS1323RT	
	Imperial	Metric	Imperial	Metric
<b>Size</b>				
Work Height	39ft 4in	12m	49ft 3in	15m
A Platform Height-Elevated	32ft 10in	10m	42ft 8in	13m
B Platform Height-Stowed	5ft 4in	1.63m	6ft	1.83m
C Platform Dimension (Length)	13ft 1in	3.98m	13ft 1in	3.98m
D Platform Dimension (Width)	6ft	1.83m	6ft	1.83m
Platform Extension	4ft 3in	1.3m	4ft 3in	1.3m
Overall Height (Rails Up)	9ft 0in	2.74m	9ft 8in	2.95m
E Overall Height (Rails Down)	6ft 9in	2.05m	7ft 5in	2.26m
F Overall Length (With Legs)	16ft	4.88m	16ft	4.88m
F Overall Length (Without Legs)	13ft 1in	3.98m	13ft 1in	3.98m
G Overall Width	7ft 7in	2.3m	7ft 7in	2.3m
H Wheelbase	9ft 6in	2.9m	9ft 6in	2.9m
I Ground Clearance	11in	0.275m	11in	0.275m
<b>Performance</b>				
Platform Capacity	2535lb	1150kg	1500lb	680kg
Capacity on Deck Extension	510lb	230kg	510lb	230kg
Drive Height	32ft 10in	10m	42ft 8in	13m
Max. Number of Workers	7		7	
Drive Speed (Stowed)	4mph	6.5km/h	4mph	6.5km/h
Drive Speed (Raised)	0.3mph	0.5km/h	0.3mph	0.5km/h
Turning Radius (Inside)	9ft	2.75m	9ft	2.75m
Turning Radius (Outside)	19ft	5.8m	19ft	5.8m
Up/Down Time	45/40s	45/40s	48/52s	48/52s
Gradeability	50% (28°)		50% (28°)	
Max. Working Slope (Lateral/Vertical)	2°/3°		2°/3°	
Drive	4WD		4WD	
Tire	33×12-20/8 Solid Tire		33×12-20/8 Solid Tire	
<b>Power</b>				
Engine	V2403-CR-E5B-ZML-2		V2403-CR-E5B-ZML-2	
Engine Power	36.8kw/2700rpm		36.8kw/2700rpm	
Fuel Tank Capacity	27.7 (us gal)	105L	27.7 (us gal)	105L
Diesel Tank	26.4 (us gal)	100L	26.4 (us gal)	100L
<b>Weight</b>				
Gross (With Legs)	16200lb	7350kg	17310lb	7850kg
Gross (Without Legs)	14220lb	6450kg	15320lb	6950kg

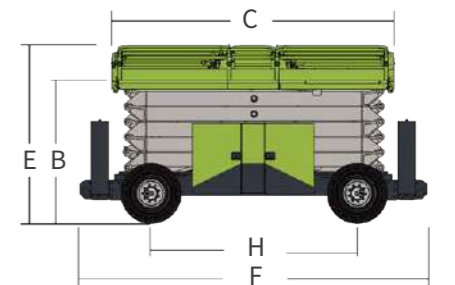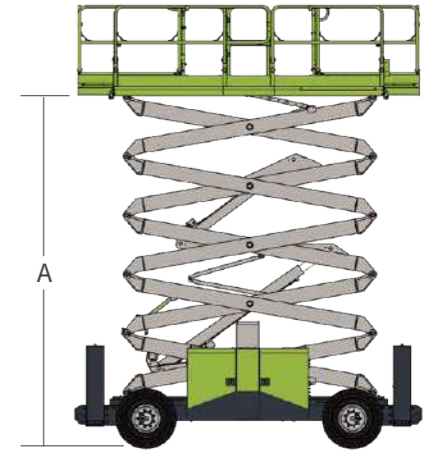

AJ Access Platforms Ltd, Pill Way, Severn Bridge Industrial Estate,  
Caldicot Monmouthshire, NP26 5PU, UK  
Phone: +44 (0) 1291 421 155  
Email: info@accessplatforms.com, sales@accessplatforms.com  
Web: www.accessplatforms.com

[Get Pricing](#)

