

ZOOMLION

ZT58J

TELESCOPIC BOOM LIFT

CE Certified

FEATURES

Standard Features

- ▶ Horn
- ▶ Proportional control
- ▶ All motion alarm
- ▶ Flashing beacon
- ▶ Self-closing entry gate
- ▶ Emergency descent system
- ▶ Emergency stop button
- ▶ Auto-leveling system
- ▶ On-board diagnostic system
- ▶ Tilt protection system
- ▶ 4.3" Led display
- ▶ Swing-out engine tray
- ▶ Anemograph
- ▶ Anti-crushing device

Accessories & Options

- ▶ Platform work light
- ▶ Anti-collision device
- ▶ AC power to platform
- ▶ Hydraulic generator
- ▶ Belt generator



HIGHLIGHTS

- ▶ Work height up to 58.8m and horizontal outreach up to 25.5m
- ▶ Industry's first polygonal innovative boom, boom weight reduced by more than 10%, vertical stiffness increased by 25%, torsion resistance increased by 20%, and offers small deformation and stable control
- ▶ X outrigger offers larger working envelope, stronger off-road ability, and better stability
- ▶ Intelligent control of four-wheel steering ensure coordination and consistency of outriggers during steering and expansion
- ▶ All-wheel steering angles are automatically matched ensure straight travel
- ▶ Five-section boom synchronously extends, efficient and stable

ACCESS WITH ZOOMLION GREEN



Model	ZT58J	
	Metric	Imperial
Size		
Work Height	58.8m	192ft 11in
Platform Height	56.8m	186ft 4in
Horizontal Outreach	25.5m	83ft 8in
A - Stowed Length	14.4m	47ft 3in
B - Stowed Width	2.5m	8ft 2in
C - Stowed Height	3.06m	10ft
D - Platform Length	2.44m	8ft
E - Platform Width	0.91m	3ft
F - Wheelbase	5.357/4.69m	17ft 7in/15ft 5in
Tread	2.5/5.15m	8ft 2in/16ft 11in
G - Ground Clearance	0.40m	1ft 4in
Performance		
Platform Capacity (Unrestricted/Restricted)	300/454kg	660/1000lb
Drive Speed (Stowed)	4.5km/h	2.8mph
Gradeability	45%(24°)	
Turning Radius (Inside)	6.79/2.57m	22ft 3in/8ft 5in
Turning Radius (Outside)	8.43/6.39m	27ft 8in/20ft 12in
Turntable Swing	360° continuous	
Platform Rotation	±90°	
Tail Swing	2.25m	7ft 5in
Jib (Range of Articulation)	125°(-55°~70°)	
Max. Wind Speed	12.5m/s	28mph
Power		
Engine	Cummins F3.8(Stage V) Cummins F4.5 (Stage IV) Cummins QSF3.8(StageIII)	
Fuel Tank Capacity	200L	52.8gal
Control Voltage	12V DC	
Hydraulic Tank Capacity	400L	105gal
Drive Mode	4WD	
Steering Mode	Four wheels/Front wheel/Crab	
Tire		
Type	Foam-filled Tires	
Weight		
Gross	29600kg	65256lb

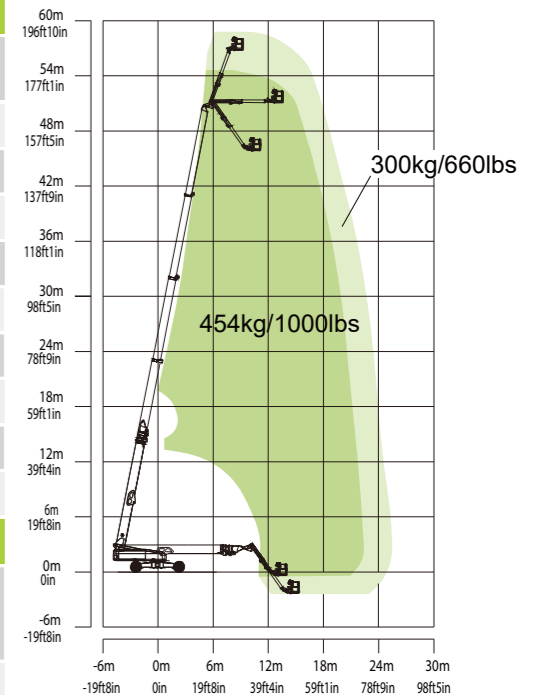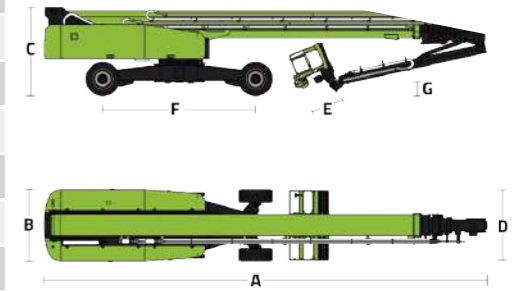

AJ Access Platforms Ltd, Pill Way, Severn Bridge Industrial Estate,
Caldicot Monmouthshire, NP26 5PU, UK
Phone: +44 (0) 1291 421 155
Email: info@accessplatforms.com, sales@accessplatforms.com
Web: www.accessplatforms.com

Get Pricing

