

SD170

SELF DRIVE ACCESS PLATFORM



17.10m (56ft) Working height

8.70m (28ft in) Working outreach

Weight Saving Design
Lower cost transportation &

Lower cost transportation & better fuel economy on site

Telescopic Upper Boom

Greater accuracy when positioning the platform

Bi-Energy AvailableOptimises utilisation

Hydraulic Outriggers
Quick & easy to set up

Fully Proportional Hydraulic Controls

Simple, reliable & easy to maintain

Platform Rotation

Better access to applications














The Nifty SD170 combines the best of our self-propelled and trailer mounted ranges. It offers the same staggering reach capabilities as the Nifty 170 but with the versatility of a robust yet very lightweight drivable base. This allows the operator to manoeuvre, set up and operate this machine without leaving the platform, especially on uneven surfaces.

SAFETY FEATURES

- CE Mark
- Pressure sensitive outriggers
- Audible & visual alarms
- Dual controls (platform & base)
- Manual descent with hand-pump
- Lock valves on all hydraulic cylinders



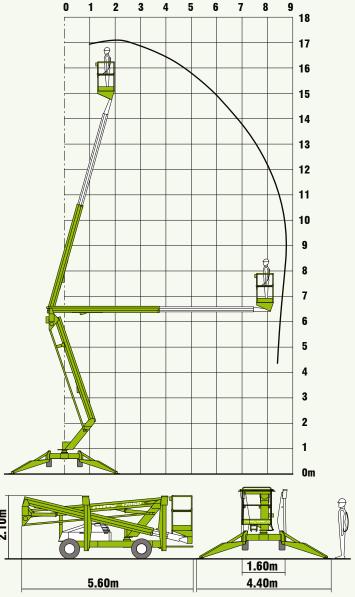

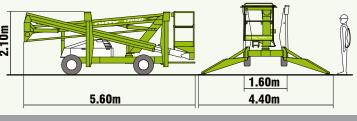





The SD170's outstanding reach makes it ideal for construction site work.





Also available trailer mounted. See Nifty 170 specification sheet.



Rough terrain tyres as standard and the 4WD option allow the SD170 to manoeuvre easily over a wide range of site conditions.

SPECIFICATIONS

| Working Height | 17.10m | 56ft |
|--------------------------|--------------------------------|-------------------|
| Platform Height | 15.10m | 49ft 6in |
| Working Outreach | 8.70m | 28ft 6in |
| Slew | 360° | |
| Width - Travelling | 1.60m | 5ft 3in |
| - Working | 4.40m | 14ft 5in |
| Height | 2.10m | 6ft 11in |
| Length | 5.60m | 18ft 4in |
| Minimum Weight | 2750kg* | 6000lbs* |
| Turning Radius - Outside | 5.20m | 17ft |
| Platform Rotation | 100° | |
| Platform Capacity | 200kg | 440lbs |
| Platform Size | 1.10m x 0.65m | 3ft 7in x 2ft 2in |
| Drive Speed | 5.0kph | 3.1mph |
| Gradeability | 25% (2x4) | 30% (4x4) |
| Control System | Fully Proportional Hydraulic | |
| Power Options | Battery Only | |
| | Petrol or Diesel Only | |
| | Bi-Energy (Engine and Battery) | |

 $f{\star}$ Weights may vary according to specification / power options, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.



NIFTYLIFT LTD **Fingle Drive** Stonebridge **Milton Keynes** England www.niftvlift.com

e-mail: info@niftylift.com Tel.: +44 (0)1908 223456 Fax.: +44 (0)1908 312733