

ES1330L

LIGHTWEIGHT ELECTRIC SCISSOR LIFT

SCISSOR LIFT



KEY SPECS

Platform Height
13-ft / 10-m

Platform Capacity
500-lb / 454-kg

Number of Occupants
Indoor: 2
Outdoor: 1

Stowed Drive Speed
2.4 mph / 3.8 km/h

KEY FEATURES

- Lightweight for indoor work on sensitive flooring, such as data centers, while also usable for outdoor applications.
- Maneuver more efficiently with a compact footprint, delivering an industry-exclusive zero turning radius for work in tight spaces.
- Reduce operating costs with electric drive and integrated components containing reduced hydraulic hoses and hydraulic fittings on the entire machine. Meaning, increased uptime as well as fewer leaks and service calls.
- Complies with A92.20 ANSI regulations, achieving the highest standards.

ACCESSORIES & OPTIONS

- Anti-Vandalism Package
- CleanGuard™
- Coiled Platform Control Box Cable
- Dual Flashing Amber Beacons - LED
- Flashing Amber Beacon - LED
- Inverter
- JLG® Mobile Control
- MDI (Ground)
- SkySense®

STANDARD SPECIFICATIONS

Performance	Indoor	Outdoor
Platform Height (Elevated)	13-ft / 3.8-m	13-ft / 3.8-m
Platform Capacity	500-lb / 227-kg	500-lb / 227-kg
Capacity on Platform Extension	250-lb / 115-kg	250-lb / 115-kg
Number of Occupants	2	1
Lift / Lower Time (No Load)	17/17 seconds	17/17 seconds
Lift / Lower Time (Rated Load)	20/16 seconds	20/16 seconds
Maximum Drive Height	Fully Elevated	Fully Elevated
Weight*	1,984-lb / 900-kg	1,984-lb / 900-kg
Max. Ground Bearing Pressure	119 psi / 8.3 kg/cm ²	119 psi / 8.3 kg/cm ²
Drive Speed (Elevated)	2.4 mph / 3.8 km/h	2.4 mph / 3.8 km/h
Drive Speed (Lowered)	0.5 mph / 0.8 km/h	0.5 mph / 0.8 km/h
Gradeability	25%	25%
Max Tilt Rating (Side-to-Side)	1.75 Degrees	1.5 Degrees
Max Tilt Rating (Fore and Aft)	3 Degrees	3 Degrees
Turning Radius (Inside)	Zero	Zero
Turning Radius (Outside)	55-in / 1.4-m	55-in / 1.4-m

*Certain options or country standards increase weight

Power

Batteries	2 x 12V 105 amp-hr
Charger	27 Amp (Universal Algorithm)
Drive	24V Electric

Tires

Standard	10 x 3-in / 255 x 75-mm
----------	-------------------------

Brakes

Electric, Friction

Hydraulic System

Capacity	1.3 gal / 5 L
Pump	Fixed Displacement Gear

STANDARD FEATURES

- 22-in (55-cm) Foot-Actuated Deck Extension
- AC Receptacle in Platform
- Active Pothole Protection System
- All Motion Alarm
- Analyzer Port for Diagnostics
- Battery Condition Indicator
- DeltaQ - 27 amp Multi-Function Universal Charger
- Diamond Tread Steel Deck
- Dynamic Braking
- Fork Lift Pockets
- Greaseless Kingpin Joints
- Horn
- Hourmeter
- Lanyard Attach Points
- Lifting and Tie Down Points
- Load Sensing System
- Lubrication Free Scissor Arm Bushings
- Manual Descent Cable
- Movable, Removable Platform Control
- Nickel Plated Pins
- Proportional Controls
- Removable Ladder
- Scissor Maintenance Prop
- Self Closing Gate
- Steel Swing-Out Doors
- Tilt Alarm and Light
- Visual Variable Tilt Indicator

ES1330L


LIGHTWEIGHT ELECTRIC SCISSOR LIFT

SCISSOR LIFT



DIMENSIONS

All dimensions are approximate

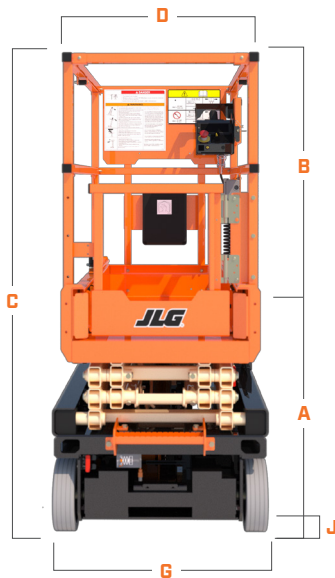

- A.** Platform Height (Lowered) 28-in / 0.7-m
- B.** Platform Railing Height 43.3-in / 1.1-m
- C.** Machine Height 71.7-in / 1.8-m
- D.** Platform Width 24.4-in / .6-m
- E.** Platform Length 49.2-in / 1.3-m

- F.** Platform Extension 21.6-in / 55-cm
- G.** Machine Width 30-in / 76-cm
- H.** Machine Length 56.2-in / 1.4-m
- I.** Wheelbase 42.3-in / 1.1-m
- J.** Ground Clearance 2.4-in / 6-cm



AJ Access Platforms Ltd

Pill Way, Severn Bridge Industrial Estate, Caldicot Monmouthshire, NP26 5PU, United Kingdom.
 Phone: +44 (0) 1291 421 155 Email: info@accessplatforms.com, sales@accessplatforms.com



We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.



JLG INDUSTRIES, INC.
 Toll-free US 877-JLG-LIFT
JLG.com

An Oshkosh Corporation Company