

ZOOMLION

ZS2032DC-Li

LI-ION BATTERY POWERED SCISSOR LIFT



FEATURES

Standard Features

- BMS (Battery Management System)
- Proportional controls
- All motion alarm
- Fold-down handrails
- Flashing amber beacon
- Self-closing entry gate
- Autobrake system
- Emergency descent system
- Emergency stop button
- Load sensing system
- Horn
- On-board diagnostic
- Over tilt protective system
- Active pothole protection system
- Drivable at full height
- Hour meter
- Extension deck (unidirectional)
- Charging protection system
- Scissor maintenance prop
- Forklift pockets
- Load sensing system
- AC power to platform

Accessories & Options

- Platform work lights
- Air line to platform
- Overhead protection bar

HIGHLIGHTS

High Performance




- Maintenance-free Lithium-ion battery
 - Up to 3 times life span than traditional wet/dry cell battery
 - Duty cycle time 20-30% increased compared to traditional wet/dry cell battery
 - Can be operated without loss of duty time down to -20 degrees, ideal for work in cold store environment
 - 5-year warranty
- Quick-charge technology save time
- Preheating function built-in for cold weather regions
- Smart Battery Management System (BMS) guarantees safety power

ACCESS WITH ZOOMLION GREEN



ZS2032DC-Li

Model	ZS2032DC-Li
Size	
Work Height	26ft 3in (8.00m)
A-Platform Height-Elevated	19ft 8in (6.00m)
B-Platform Height-Stowed	3ft 8in (1.13m)
C-Platform Length	7ft 7in (2.30m)
D-Platform Width	2ft 8in (0.81m)
Platform Extension	3ft (0.91m)
E-Overall Height (Rails Up)	7ft 5in (2.27m)
Overall Height (Rails Down)	5ft 10in (1.77m)
F-Overall Length	8ft 2in (2.49m)
G-Overall Width	2ft 8in (0.81m)
H Wheelbase	6ft 1in (1.85m)
I-Ground Clearance (Stowed)	4.5in (0.11m)
J-Ground Clearance (Raised)	0.75in (0.02m)
Performance	
Platform Capacity	840lb (380kg)
Capacity on Deck Extension	250lb (113kg)
Max. Number of Workers	Indoor: 2 Outdoor: 1
Drive Speed (Stowed)	2.5mph (4km/h)
Drive Speed (Raised)	0.5mph (0.8km/h)
Turning Radius (Inside)	4in (0.1m)
Turning Radius (Outside)	6ft 11in (2.1m)
Lifting Motor	24V/3.3KW
Drive Motor	24V/2x0.75KW
Up/Down Time	28s/35s
Gradeability	30% (17°)
Max. Working Slope (Lateral/Vertical)	1.5°/3°
Control	Proportional Control
Drive	Front Wheels
Brake	Front Wheels
Tire	Ø15in×5in (Ø381mm×127mm)
Power	
Battery	160Ah Li-ion
Charger	24V/30A
Charger (Option)	24V/60A
Weight	
Gross	4280lb (1940kg)

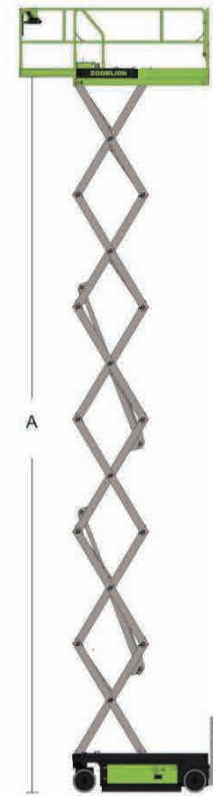

A **battery management system (BMS)** is any electronic system that manages a rechargeable battery (cell or battery pack), such as by protecting the battery from operating outside its safe operating area, monitoring its state, calculating secondary data, reporting that data, controlling its environment, authenticating it and/or balancing it.